

NOYES® C880 QUAD Certification Test Kit



C860 with DFS1 Digital FiberScope

Features

- Hand-held, 0.9 kg (2 lb)
- Inspection capable with the DFS1 Digital FiberScope
- Integrated OPM, OLS, and VFL (650 nm)
- OLS sources: LED - 850/1300 nm; Laser - 1310/1550 nm
- Dual-wavelength certification Pass/Fail
- Two fibers bi-directional and single fiber testing
- >8 hours battery life or AC power
- Touch and Test™ user interface
- TRM™ reporting software
- Internal (1000s tests) and USB storage
- USB host and function ports

Combining two C840 Certification Testers, the NOYES C880 QUAD Certification Test Kit from AFL is designed for testing and troubleshooting both multimode and single-mode fiber links. Each tester includes an integrated Visual Fault Locator (VFL, 650 nm), both single-mode (Laser 1310/1550 nm) and multimode (LED 850/1300 nm) Optical Light Sources (OLS), and an Optical Power Meter (OPM). Each tester may be used alone as a traditional power meter, light source, or visual fault locator.

In Auto Test mode, the user may perform certification tests to one of the industry cabling standards (TIA, ISO, EN), one or more application standards, or a user-defined loss/length limit. Certification reports may be generated based on the selected standards and rules using PC reporting software. The transreflective touch screen display of the C840 tester is suitable for both indoor and outdoor operation.

The C840 supports visual inspection per IEC 61300-3-35 using the DFS1 Digital FiberScope allowing users the ability to view and document connector end-face images.

Thousands of test results may be stored internally for transfer to a computer via a USB cable or a standard USB drive for viewing, printing, and analyzing with the supplied Windows® compatible software - TRM™ (Test Results Manager). Acceptance reports generated using TRM™ can include certification reports and end-face images.

Applications

- Tier 1 testing of premise networks
- Bi-directionally measure loss and length of fiber links
- Save time simultaneously testing two fibers at two wavelengths
- Verify polarity
- Certify SM and MM networks to industry standards (ISO/TIA/EN) and applications
- Find faults using integrated Visual Fault Locator
- Create and test to user defined rules
- Review Pass/Fail feedback after each test
- Review fibers by cable and retest fiber pairs if needed
- Create professional certification reports



NOYES® C880 QUAD Certification Test Kit

Ordering Information


Each C880 kit or C840 kit includes two (2) C840s or one (1) C840 Tester respectively, USB Flash drive, PC software for OTDR trace analysis and certification or OPM loss reporting, AC adapters (two (2) with C880 kit, one (1) with C840 kit), switchable test ports adapters, and accessories (see table below).

MODEL	CARRY CASE	TEST CORDS ^A	ADAPTERS			CLEANING PRODUCTS
			OLS	OPM	VFI	
C880-100-LP1-S1	Soft case	SC/LC	SC, ST, LC	SC, 2.5, 1.25 mm	2.5, 1.25 mm	One-Click Cleaner SC/ST/FC, 2.5 mm One-Click Cleaner LC, 1.25 mm
C880-100-LP1-S2	Soft case	SC/ST	SC, ST, LC	SC, 2.5, 1.25 mm	2.5, 1.25 mm	One-Click Cleaner SC/ST/FC, 2.5 mm
C840-100-LP1-S1	Soft case	—	SC, ST, LC	SC, 2.5, 1.25 mm	2.5, 1.25 mm	One-Click Cleaner SC/ST/FC, 2.5 mm

The C840 Certification Tester works with the DFS1 Digital FiberScope.

When placing an order, select options as follows: Model, Optical Configuration, Language, and Case.

Example: C880 — 100 — LP1 — S1

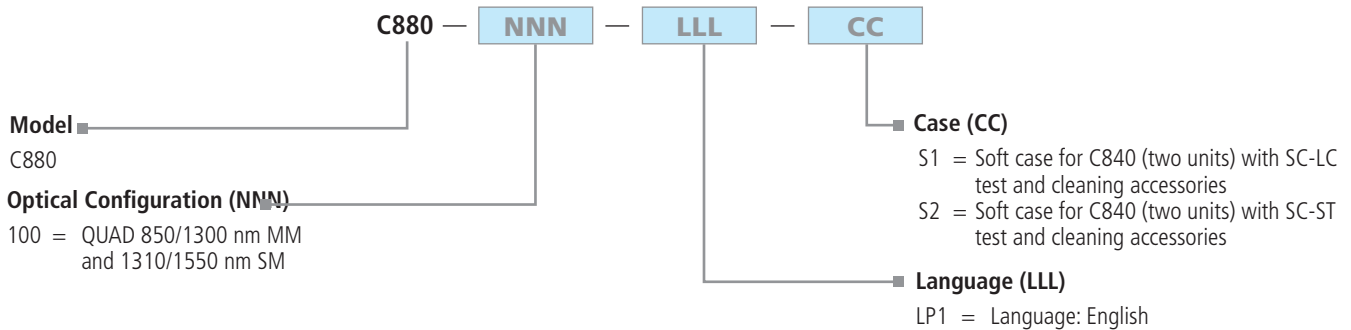

C880—100—LP1—S1 (or S2) C880 Kit Contents

ITEM	DESCRIPTION
C840	QUAD Auto Test Certification Tester (2 ea)
Adapters	OLS Ports — SC, ST, LC OPM port — SC, 1.25 and 2.5 mm Universal VFI port — 1.25 and 2.5 mm Universal
Jumpers (12)	2 m (62.5 μm, 50 μm, SM)
Miscellaneous Accessories	Mandrels (2) — 62.5 μm, 3 mm jacket
	Mandrels (2) — 50 μm, 3 mm jacket
	Stylus pens for touch screen
	USB thumb drive -1G, USB to mini-USB cable
	AC adapters (2), specify country of use
Cleaning Accessories	(2) One-Click Cleaner SC/ST/FC, 2.5 mm (S1 and S2 kit)
	One-Click Cleaner LC/MU, 1.25 mm (S1 kit only)
Cases	Soft case (2)
Report Software	PC software and user guide

Notes:

a. (4) each - 2 m (62.5μm, 50 μm, SM).

Inspection and Cleaning Accessories

MODEL	DESCRIPTION
DFS1-00-04XU	DFS1 Digital FiberScope PC/UPC Inspection Kit
DFS1-00-04XA	DFS1 Digital FiberScope APC Inspection Kit
DFS1-00-04XN	DFS1 USB Digital Fiber Inspection Kit without Adapters
8500-20-0900	Wet Cleaning Kit (shown) for SC/FC/ST/LC connectors.
8500-20-0901	Dry Cleaning Kit
8500-05-0001MZ	One-Click Cleaner SC, ST, FC (500+ cleans)
8500-05-0002MZ	One-Click Cleaner LC/MU (500+ cleans)
8500-05-0005MZ	One-Click Mini-100 SC, ST, FC (100+ cleans)
8500-05-0006MZ	One-Click Mini-100 LC/MU (100+ cleans)
8500-05-0007MZ	One-Click Cleaner Ultra 2.5 SC, ST, FC (enlarged cleaning)

NOYES® C880 QUAD Certification Test Kit

Specifications ^a

POWER METER	
Auto Test Wavelengths	850/1300 nm (MM), 1310/1550 nm (SM)
Detector Type	InGaAs 2 mm
Measurement Range	+6 to -60 dBm
Accuracy ^b	±0.25
Measurement Units	dB, dBm, mW
Wavelength ID ^c	Yes (to -47 dBm)
Set Reference	Yes
Data Storage	Yes
Tone Detection	Yes (to -47 dBm)

LIGHT SOURCE	MULTIMODE PORT	SINGLE-MODE PORT
Available Wavelengths	850/1300 nm (nominal)	1310/1550 nm (nominal)
Emitter Type	LED	Laser
Safety Class	Class I FDA 21 CFR 1040.10 and 1040.11, IEC EN60825-1: 2007-03	
Output Power	>-20 dBm, 62.5 μm MM ^d	0 dBm, 9 μm SM
Stability (after 15 minutes warm up)	±0.1 dB over 1 hour	±0.07 dB over 1 hour ±0.15 dB over 8 hours
Wave ID Transmit	Yes	
Tone Generation	270 Hz, 330 Hz, 1 KHz, 2 kHz	

VISUAL FAULT LOCATOR	
Emitter Type	Laser
Safety Class	Class II FDA 21 CFR 1040.10 and 1040.11, IEC 60825-1: 2007-03
Wavelength	650 ±20 nm
Output Power (nominal)	0.8 mW

GENERAL	
Test Modes	Auto Test, OPM, OLS, VFL, DFS
Length Measurement Range	5 km (MM); 200 km (SM)
Data Storage	Internal flash memory USB flash drive (2.0) Downloadable from unit directly to PC
Data Storage Capacity	Internal >1000 fibers
Data Transfer to PC	USB
Tool Free Adapters	Modular cleanable SC/ST/LC
Size	23 x 11 x 7 cm (8.8 x 4.3 x 2.8 in)
Weight	0.9 kg (2 lb)
Operating Temperature	-10 °C to +50 °C, 0 to 90 % RH (non-condensing)
Storage Temperature	-20 °C to +60 °C, 0 to 90 % RH (non-condensing)
Power	Rechargeable Li-Ion or AC power adapter
Battery Life ^{e, g}	>8 hours continuous testing
Recharge Time ^{f, g}	4 hours
Display	9.65 cm (3.8 in), color, transfective

Notes:

- All specifications valid at 25 °C unless otherwise specified.
- Accuracy measured at -10 dBm per N.I.S.T. standards.
- Automatic wavelength identification and switching when used with NOYES Wave ID Series Light Sources.
- Output power will be approximately 3 dB less if a 50 μm mandrel-wrapped jumper is used instead of a 62.5 μm mandrel-wrapped jumper.
- Typical, depending on display brightness.
- Typical, from fully discharged to fully charged state, unit may be operating.
- External battery charger available.

Authorized Channel Partner



United States
Customer Service
1.800.321.5298
1.603.528.7780
www.AFLglobal.com

Europe, Middle East, Africa
Max Penfold
Max.Penfold@AFLglobal.com
+44 1799 542 840
+44 7802 839 160

Middle East
Ahmed El Sakaty
Ahmed.ELsakaty@AFLglobal.com
+20 106 451 523

Africa (Sub Sahara)
Nicholas Cole
Nicholas.Cole@AFLglobal.com
+44 7702 005 590

Greater China
Dai Liu
Dai.Liu@AFLglobal.com
+86 133 1101 4533

Asia-Pacific (non-China)
Saw Biing Huei
Biing.Saw@AFLglobal.com
+65 9791 3398